


DLSR 系列导电滑环/DLSR series conductive slip ring

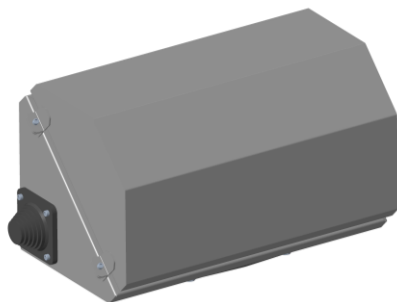

产品特点 Product Features

- 安装灵活、可靠性高,可适应长时间工作 Flexible installation, high reliability, can adapt to long time work
- 采用进口碳刷制作, 载流量大, 磨损少 Imported carbon brush production, large load, less wear
- 采用特殊的空架式结构, 利于散热 The use of special overhead structure, conducive to heat dissipation
- 防护等级可达 IP65 The protection level is up to IP65

产品使用寿命超长, 避免产品使用维护 The service life of the product is very long

产品型号 Product Model

DLSR- A B C D E F G H I J K L M N O P Q R S T U V W X Y Z AA AB AC AD AE AF AG AH AI AJ AK AL AM AN AO AP AQ AR AS AT AU AV AW AX AY AZ BA BB BC BD BE BF BG BH BI BJ BK BL BM BN BO BP BQ BR BS BT BU BV BW BX BY BZ CA CB CC CD CE CF CG CH CI CJ CK CL CM CN CO CP CQ CR CS CT CU CV CW CX CY CZ DA DB DC DD DE DF DG DH DI DJ DK DL DM DN DO DP DQ DR DS DT DU DV DW DX DY DZ EA EB EC ED EE EF EG EH EI EJ EK EL EM EN EO EP EQ ER ES ET EU EV EW EX EY EZ FA FB FC FD FE FF FG FH FI FJ FK FL FM FN FO FP FQ FR FS FT FU FV FW FX FY FZ GA GB GC GD GE GF GG GH GI GJ GK GL GM GN GO GP GQ GR GS GT GU GV GW GX GY GZ HA HB HC HD HE HF HG HH HI HJ HK HL HM HN HO HP HQ HR HS HT HU HV HW HX HY HZ IA IB IC ID IE IF IG IH II IJ IK IL IM IN IO IP IQ IR IS IT IU IV IW IX IY IZ JA JB JC JD JE JF JG JH JI JJ JK JL JM JN JO JP JQ JR JS JT JU JV JW JX JY JZ KA KB KC KD KE KF KG KH KI KJ KK KL KM KN KO KP KQ KR KS KT KU KV KW KX KY KZ LA LB LC LD LE LF LG LH LI LJ LK LL LM LN LO LP LQ LR LS LT LU LV LW LX LY LZ MA MB MC MD ME MF MG MH MI MJ MK ML MM MN MO MP MQ MR MS MT MU MV MW MX MY MZ NA NB NC ND NE NF NG NH NI NJ NK NL NM NN NO NP NQ NR NS NT NU NV NW NX NY NZ OA OB OC OD OE OF OG OH OI OJ OK OL OM ON OO OP OQ OR OS OT OU OV OW OX OY OZ PA PB PC PD PE PF PG PH PI PJ PK PL PM PN PO PP PQ PR PS PT PU PV PW PX PY PZ QA QB QC QD QE QF QG QH QI QJ QK QL QM QN QO QP QQ QR QS QT QU QV QW QX QY QZ RA RB RC RD RE RF RG RH RI RJ RK RL RM RN RO RP RQ RR RS RT RU RV RW RX RY RZ SA SB SC SD SE SF SG SH SI SJ SK SL SM SN SO SP SQ SR SS ST SU SV SW SX SY SZ TA TB TC TD TE TF TG TH TI TJ TK TL TM TN TO TP TQ TR TS TT

最高工作速度最高工作速度/Maximum working speed	0~50rpm
工作温度/operating temperature	-40~+85℃
接触材质/Contact material	碳刷/carbon brush
壳体材质/shell material	304
振动/vibrational frequency	30g ,10-2000Hz
冲击/Impact resistance class	500g ,1ms
防护等级/protection level	IP65

电气参数/electric parameter

描述/Description	技术参数
载流值/Current	100-500A
绝缘电阻/insulation resistance	≥500MΩ/1000VDC
绝缘体强度/Insulator strength	1000CAC/50Hz,60s
动态电阻变化值/Dynamic resistance change value	< 0.01Ω

产品安装 Product Installation

